

ARA WALL

Ilaria Marelli

Famiglia di lampade da terra e da parete con sorgenti LED, disponibili versioni LED e DTW (DIM to Warm). Composta da due elementi in alluminio estruso. La struttura è verniciata bianco, antracite, champagne, mentre l'elemento rotante può essere anodizzato lucido o verniciato bianco. La sorgente uplight può essere LED e crea una luce diffusa verso il soffitto, nel rotante invece è presente una sorgente LED per un'illuminazione diffusa e orientabile. Le versioni LED sono dotate della nuova tecnologia "Dim to Warm", alla diminuzione dell'intensità della luce corrisponde un aumento della temperatura colore. L'alimentazione è integrata per entrambi le versioni mentre il dimmer è sul cavo nella versione LED+LED e integrato nella versione DTW.



69 LED

LAMPING

Source	LED board
Total power	2x16W
Emission	double
Switching	dimmable, DALI/push, mono switch
Tension	230V
Color temperature	3000K
Luminous flux	3600lm (source luminous flux)
Typ CRI	85
Energy class	A+
IP class	40
Materials	aluminium + PMMA
Notes	orientable, anthracite RAL7016, champagne RAL9007
Net lamp weight	3,5 kg

Codes

ARA LWW 32
ARA LWL 32
ARA LXL 32
ARA LDL 32

Structure/Diffuser


white/white
white/polished
anthracite/polished
champagne/polished

PACKAGE

Package 01

Dimension: 80x30x19 cm / Gross weight: 4,5 kg

Certificazioni

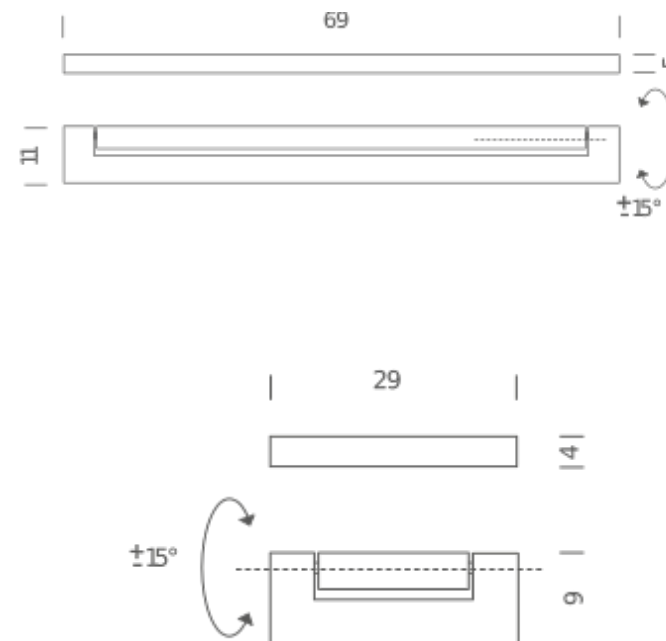

29 LED

LAMPING

Source	LED board
Total power	2x8W
Emission	double
Switching	mono switch
Tension	110/230V
Color temperature	3000K
Luminous flux	1300lm (source luminous flux)
Typ CRI	85
Energy class	A+
IP class	40
Materials	aluminium + PMMA
Notes	orientable diffuser, anthracite RAL7016, champagne RAL9007
Net lamp weight	1 kg

Codes

ARA LWW 35
ARA LWL 35
ARA LXL 35
ARA LDL 35


Structure/Diffuser

white/white
white/polished
anthracite/polished
champagne/polished

PACKAGE

Package 01 Dimension: 18x38x12 cm / Gross weight: 1,5 kg

Certificazioni

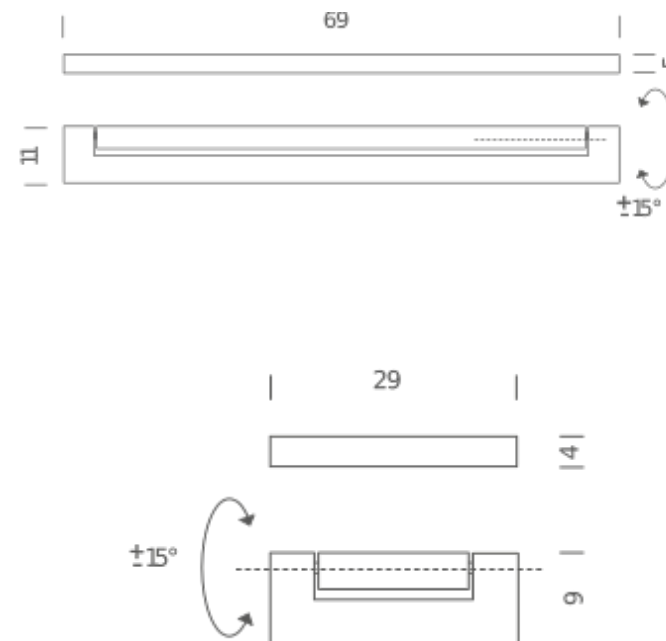

29 LED TRIAC | 2700K

LAMPING

Source	LED board
Total power	11,5W
Emission	double
Switching	TRIAC
Tension	230V
Color temperature	2700K
Luminous flux	911lm
Typ CRI	85
IP class	40
Dimensions	29x9x4
Materials	Aluminium + PMMA
Notes	orientable, anthracite RAL 7016


Codes

- ARA LWW 36
- ARA LXX 36
- ARA LWL 36
- ARA LXL 36

Structure/Diffuser

- white/white
- anthracite/anthracite
- white/polished
- anthracite/polished

Certificazioni

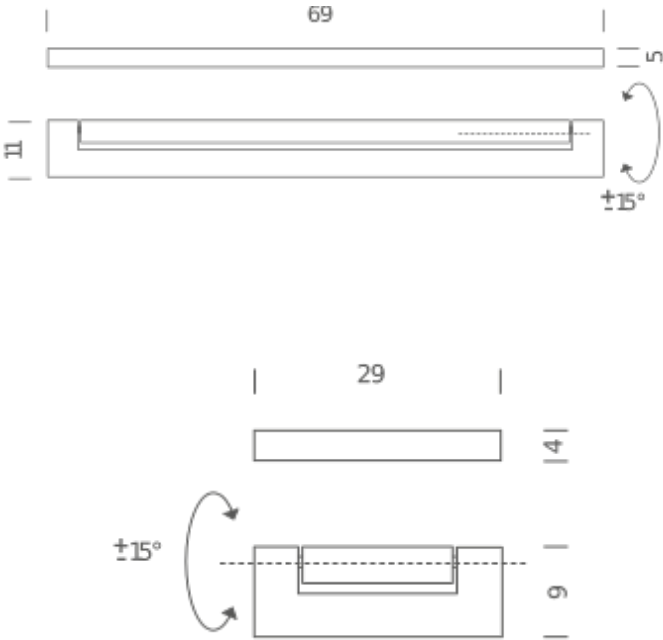

29 LED TRIAC | 3000K

LAMPING

Source	LED board
Total power	11,5W
Emission	double
Switching	TRIAC
Tension	230V
Color temperature	3000K
Luminous flux	911lm
Typ CRI	85
IP class	40
Dimensions	29x9x4
Materials	Aluminium+PMMA
Notes	orientable, anthracite RAL 7016

Codes

- ARA LWW 37
- ARA LXX 37
- ARA LWL 37
- ARA LXL 37

Structure/Diffuser

- white/white
- anthracite/anthracite
- white/polished
- anthracite/polished

Certificazioni

